


Flange Units – Standard 4-Bolt Set Screw Locking

- Standard duty, high-grade cast iron
- Wide inner ring bearing
- Relubricatable unit with anti-rotation pin
- Standard seal: R-seal

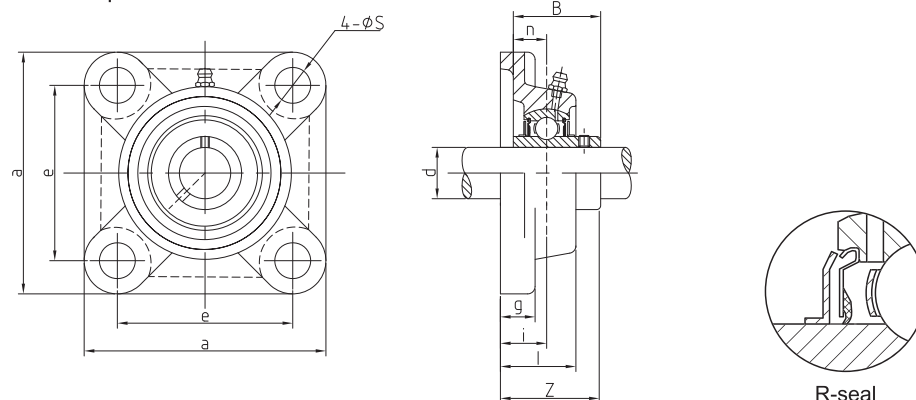

UCF200 Series


Bearing Unit	Shaft Dia.		Dimensions										Bearing No.	Housing No.
	(in.)	(mm)	a	e	i	g	l	s	Z	B	n	Bolt Size		
UCF201-8	1/2		3-3/8 85.7	2-1/2 63.5	0.592 15	0.433 11	1 25.4	27/64 11	1.31 33.3	1.023 31	0.500 12.7	3/8 M10	UC201-8	F203
UCF202-10	5/8												UC202-10	
UCF203-11	11/16												UC203-11	
UCF201		12											UC201	
UCF202		15											UC202	
UCF203		17											UC203	
UCF204-12	3/4		3-3/8 85.7	2-1/2 63.5	0.592 15	7/16 11.1	1 25.4	0.472 12	1.31 33.3	1.220 31	0.500 12.7	3/8 M10	UC204-12	F204
UCF204-13	13/16												UC204-13	
UCF204		20											UC204	
UCF205-13	13/16		3-3/4 95.3	2-3/4 69.9	0.631 16	0.551 14	1-1/16 26.9	15/32 12	1.41 35.7	1.339 34	0.563 14.3	3/8 M10	UC205-13	F205
UCF205-14	7/8												UC205-14	
UCF205-15	15/16												UC205-15	
UCF205-16	1												UC205-16	
UCF205		25											UC205	
UCF206-17	1-1/16		4-1/4 108	3-1/4 82.6	0.720 18.3	9/16 14.3	1.220 31	15/32 12	1.59 40.5	1.500 38.1	0.626 15.9	3/8 M10	UC206-17	F206
UCF206-18	1-1/8												UC206-18	
UCF206-19	1-3/16												UC206-19	
UCF206-20	1-1/4												UC206-20	
UCF206		30											UC206	
UCF207-20	1-1/4		4-19/32 116.7	3-5/8 92.1	0.750 19.1	0.630 16	1.339 34	17/32 13.5	1.75 44.5	1.689 42.9	0.689 17.5	7/16 M12	UC207-20	F207
UCF207-21	1-5/16												UC207-21	
UCF207-22	1-3/8												UC207-22	
UCF207-23	1-7/16												UC207-23	
UCF207		35											UC207	
UCF208-24	1-1/2		5-1/8 130.2	4 101.6	0.834 21.2	0.630 16	1-13/32 35.7	0.630 16	2.016 51.2	1.937 49.2	0.748 19	1/2 M14	UC208-24	F208
UCF208-25	1-9/16												UC208-25	
UCF208		40											UC208	
UCF209-26	1-5/8		5-3/8 136.5	4-1/8 105	0.874 22.2	0.709 18	1-1/2 38.1	0.630 16	2.06 52.4	1.937 49.2	0.748 19	1/2 M14	UC209-26	F209
UCF209-27	1-11/16												UC209-27	
UCF209-28	1-3/4												UC209-28	
UCF209		45											UC209	
UCF210-29	1-13/16												UC210-29	
UCF210-30	1-7/8		5-5/8 142.9	4.370 111	0.873 22.2	0.709 18	1-9/16 39.7	0.630 16	2.16 54.8	2.031 51.6	0.748 19	1/2 M14	UC210-30	F210
UCF210-31	1-15/16												UC210-31	
UCF210-32	2												UC210-32	
UCF210		50											UC210	

Note: 1) Relubricatable types have suffix "D1". If maintenance free type is needed, please order without suffix "D1".



Flange Units – Standard 4-Bolt Set Screw Locking

- Standard duty, high-grade cast iron
- Wide inner ring bearing
- Relubricatable unit with anti-rotation pin
- Standard seal: R-seal

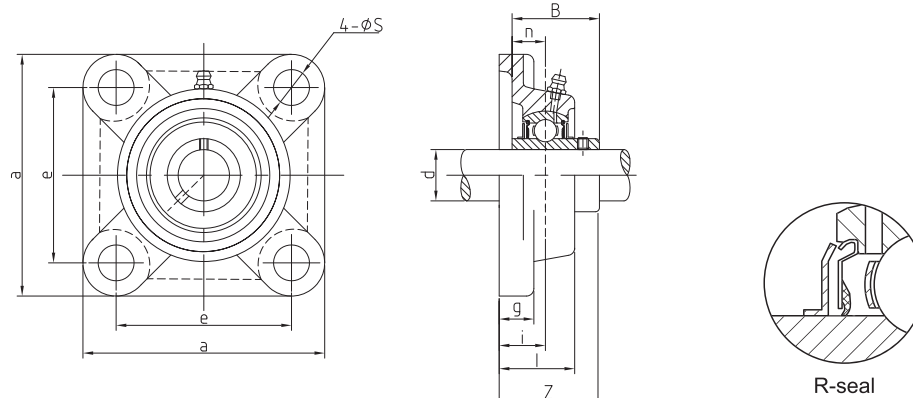


UCF200 Series

Bearing Unit	Shaft Dia.		Dimensions										Bearing No.	Housing No.
	(in.)	(mm)	a	e	i	g	l	s	Z	B	n	Bolt Size		
UCF211-32	2												UC211-32 UC211-33 UC211-34 UC211-35 UC211	F211
UCF211-33	2-1/16													
UCF211-34	2-1/8		6-3/8	5-1/8	0.998	0.787	1-11/16	0.748	2.31	2.189	0.874	5/8		
UCF211-35	2-3/16		161.9	130.2	25.3	20	42.9	19	58.7	55.6	22.2	M16		
UCF211		55												
UCF212-36	2-1/4												UC212-36 UC212-37 UC212-38 UC212-39 UC212	F212
UCF212-37	2-5/16													
UCF212-38	2-3/8		6-7/8	5-5/8	1.156	0.787	1.890	0.748	2.72	2.563	1.000	5/8		
UCF212-39	2-7/16		174.6	142.9	29.4	20	48	19	69.1	65.1	25.4	M16		
UCF212		60												
UCF213-40	2-1/2												UC213-40 UC213-41 UC213	F213
UCF213-41	2-9/16		7-3/8	5-7/8	1.187	0.787	1-31/32	0.748	2.75	2.563	1.000	5/8		
UCF213		65	187.3	149	30	20	50	19	69.8	65.1	25.4	M16		
UCF214-42	2-5/8												UC214-42 UC214-43 UC214-44 UC214	F214
UCF214-43	2-11/16		7-19/32	6	1.221	0.945	2-1/8	0.748	2.97	2.937	1.189	5/8		
UCF214-44	2-3/4		192.9	152.4	31	24	53.9	19	75.4	74.6	30.2	M16		
UCF214		70												
UCF215-45	2-13/16												UC215-45 UC215-46 UC215-47 UC215-48 UC215	F215
UCF215-46	2-7/8													
UCF215-47	2-15/16		7-7/8	6-1/4	1.342	0.945	2-7/32	0.748	3.09	3.063	1.311	5/8		
UCF215-48	3		200	158.8	34.1	24	56.4	19	78.6	77.8	33.3	M16		
UCF215		75												
UCF216-50	3-1/8												UC216-50 UC216	F216
UCF216		80	8-3/16	6-1/2	1.340	0.945	2-9/32	0.905	3.28	3.252	1.311	3/4		
UCF216			207.9	165.1	34	24	57.9	23	83.3	82.6	33.3	M20		
UCF217-52	3-1/4												UC217-52 UC217-55 UC217	F217
UCF217-55	3-7/16		8-21/32	6-57/64	1.406	1	2-15/32	0.905	3.44	3.374	1.343	3/4		
UCF217		85	219.9	175	35.7	26	62.7	23	87.4	85.7	34.1	M20		
UCF218-56	3-1/2												UC218-56 UC218	F218
UCF218-57		90	9-1/4	7-23/64	1.565	1	2-11/16	0.905	3.78	3.780	1.563	3/4		
UCF218-57			234.9	186.9	39.8	25.4	68.3	23	96.1	96	39.7	M20		

Note: 1) Relubricatable types have suffix "D1". If maintenance free type is needed, please order without suffix "D1".

Flange Units – Medium Duty 4-Bolt Set Screw Locking

- Medium duty, high-grade cast iron
- Wide inner ring bearing
- Relubricatable unit with anti-rotation pin
- Standard seal: R-seal

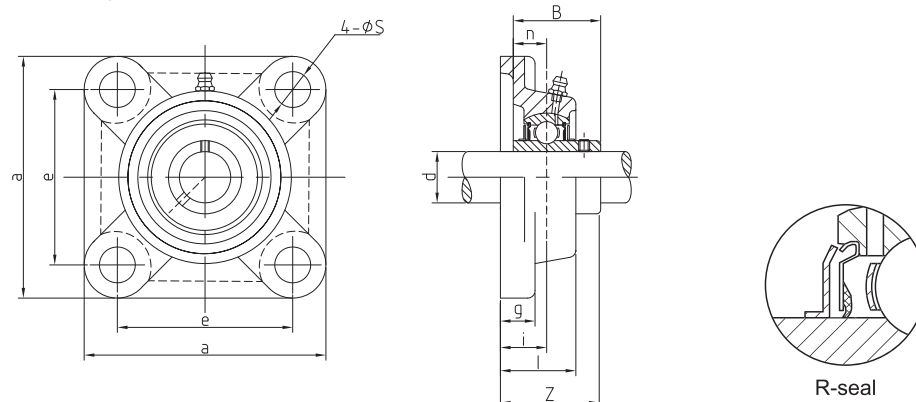

UCFX00 Series


Bearing Unit	Shaft Dia.		Dimensions										Bearing No.	Housing No.
	(in.)	(mm)	a	e	i	g	l	s	Z	B	n	Bolt Size		
UCFX05-13	13/16		4-1/4 108	3-1/4 82.6	0.720 18.3	0.512 13	1.181 30	15/32 12	1.59 40.5	1.500 38.1	0.626 15.9	3/8 M10	UCX05-13	FX05
UCFX05-14	7/8												UCX05-14	
UCFX05-15	15/16												UCX05-15	
UCFX05-16	1												UCX05-16	
UCFX05		25											UCX05	
UCFX06-17	1-1/16		4-19/32 116.7	3-5/8 92.1	0.750 19.1	0.563 14.3	1.339 34	0.630 16	1.75 44.5	1.937 49.2	0.689 17.5	1/2 M14	UCX06-17	FX06
UCFX06-18	1-1/8												UCX06-18	
UCFX06-19	1-3/16												UCX06-19	
UCFX06-20	1-1/4												UCX06-20	
UCFX06		30											UCX06	
UCFX07-20	1-1/4		5-1/8 130.2	4 101.6	0.834 21.2	0.563 14.3	1.496 38	0.630 16	2.02 51.4	1.937 49.2	0.748 19	1/2 M14	UCX07-20	FX07
UCFX07-21	1-5/16												UCX07-21	
UCFX07-22	1-3/8												UCX07-22	
UCFX07-23	1-7/16												UCX07-23	
UCFX07		35											UCX07	
UCFX08-24	1-1/2		5-3/8 136.5	4-1/8 105	0.874 22.2	0.563 14.3	1.575 40	0.748 19	2.06 52.4	1.937 49.2	0.748 19	5/8 M16	UCX08-24	FX08
UCFX08-25	1-9/16												UCX08-25	
UCFX08		40											UCX08	
UCFX09-26	1-5/8		5-5/8 142.9	4-3/8 111.1	0.873 22.2	0.563 14.3	1.575 40	0.748 19	2.16 54.8	2.031 51.6	0.748 19	5/8 M16	UCX09-26	FX09
UCFX09-27	1-11/16												UCX09-27	
UCFX09-28	1-3/4												UCX09-28	
UCFX09		45											UCX09	
UCFX10-29	1-13/16		6-3/8 161.9	5-1/8 130.2	0.998 25.3	0.787 20	1.732 44	0.748 19	2.31 58.7	2.189 55.6	0.874 22.2	5/8 M16	UCX10-29	FX10
UCFX10-30	1-7/8												UCX10-30	
UCFX10-31	1-15/16												UCX10-31	
UCFX10-32	2												UCX10-32	
UCFX10		50											UCX10	
UCFX11-32	2		6-7/8 174.6	5-5/8 142.9	1.156 29.4	0.787 20	1.929 49	0.748 19	2.72 69.1	2.563 65.1	1.000 25.4	5/8 M16	UCX11-32	FX11
UCFX11-33	2-1/16												UCX11-33	
UCFX11-34	2-1/8												UCX11-34	
UCFX11-35	2-3/16												UCX11-35	
UCFX11-36	2-1/4												UCX11-36	
UCFX11		55											UCX11	
UCFX12-37	2-5/16		7-3/8 187.3	5-7/8 149	1.339 34	0.827 21	2.323 59	0.748 19	2.9 73.7	2.563 65.1	1.000 25.4	5/8 M16	UCX12-37	FX12
UCFX12-38	2-3/8												UCX12-38	
UCFX12-39	2-7/16												UCX12-39	
UCFX12		60											UCX12	

Note: 1) Relubricatable types have suffix "D1". If maintenance free type is needed, please order without suffix "D1".



Flange Units – Medium Duty 4-Bolt Set Screw Locking

- Medium duty, high-grade cast iron
- Wide inner ring bearing
- Relubricatable unit with anti-rotation pin
- Standard seal: R-seal

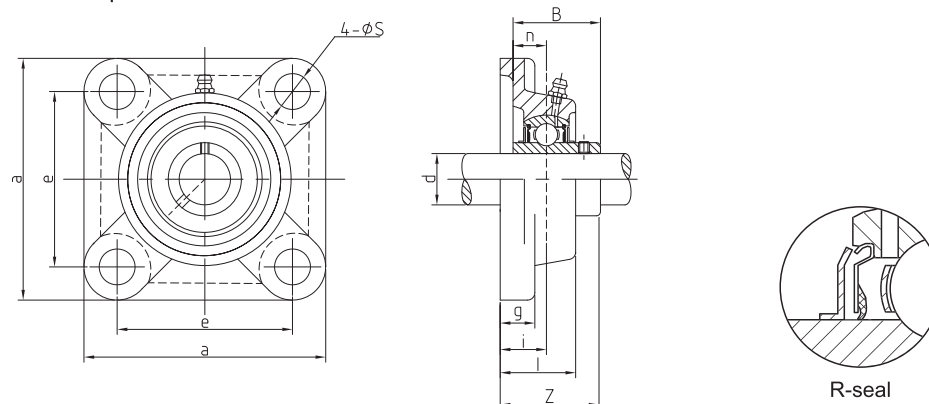

UCFX00 Series




Bearing Unit	Shaft Dia.		Dimensions									Bearing No.	Housing No.
	(in.)	(mm)	a	e	i	g	l	s	Z	B	n		
UCFX13-40	2-1/2		7-3/8	5-7/8	1.339	0.827	2.323	0.748	3.087	2.937	1.189	UCX13-40	FX13
UCFX13-41	2-9/16		187	149	34	21	59	19	78.4	74.6	30.2	UCX13-41	
UCFX13		65										UCX13	
UCFX14-42	2-5/8		7.756	5.984	1.457	0.945	2.362	0.906	3.208	3.063	1.311	UCX14-42	FX14
UCFX14-43	2-11/16											UCX14-43	
UCFX14-44	2-3/4											UCX14-44	
UCFX14		70										UCX14	
UCFX15-45	2-13/16		7.756	5.984	1.575	0.945	2.677	0.906	3.516	3.252	1.311	UCX15-45	FX15
UCFX15-46	2-7/8											UCX15-46	
UCFX15-47	2-15/16											UCX15-47	
UCFX15-48	3		197	152	40	24	68	23	89.3	82.6	33.3	UCX15-48	FX15
UCFX15		75										UCX15	
UCFX16-50	3-1/8		8.425	6.732	1.575	15/16	2.756	0.906	3.606	3.374	1.343	UCX16-50	FX16
UCFX16		80	214	171	40	23.8	70	23	91.6	85.7	34.1	UCX16	
UCFX17-52	3-1/4		8.425	6.732	1.575	15/16	2.756	0.906	3.780	3.780	1.563	UCX17-52	FX17
UCFX17		85	214	171	40	24	70	23	96	96	39.7	UCX17	
UCFX18-56	3-1/8		8.425	6.732	1.772	15/16	2.992	0.906	4.177	4.094	1.689	UCX18-56	FX18
UCFX18		80	214	171	45	23.8	76	23	106	104	42.9	UCX18	
UCFX20-64	3-1/4		10.551	8.307	2.323	1.221	3.819	1.221	5.012	4.626	1.689	UCX20-64	FX20
UCFX20-64		85	268	211	59	31	97	31	127.3	117.5	42.9	UCX20	

Note: 1) Relubricatable types have suffix "D1". If maintenance free type is needed, please order without suffix "D1".



Flange Units – Standard 4-Bolt Eccentric Locking Collar

- Standard duty, high-grade cast iron
- Solid base housing design
- Wide inner ring bearing
- Relubricatable unit
- Standard seal: R-seal

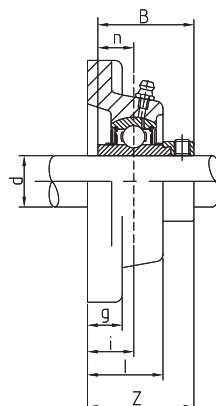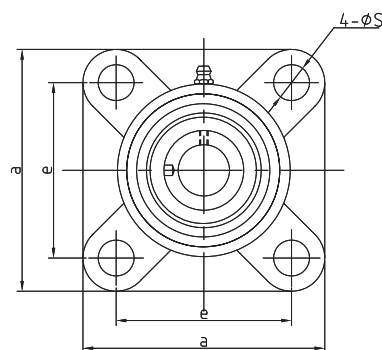

R-seal


HCFS200 Series

Bearing Unit	Shaft Dia.		Dimensions										Bearing No.	Housing No.
	(in.)	(mm)	a	e	i	g	l	s	Z	B	n	Bolt Size		
HCFS201-8	1/2		3-3/8 85.7	2-1/2 63.5	0.750 19.1	0.454 15	1.161 29.5	7/16 11.5	1.795 45.6	1.721 43.7	0.673 17.1	3/8 M10	HC201-8	FS204
HCFS202-10	5/8												HC202-10	
HCFS203-11	11/16												HC203-11	
HCFS201		12											HC201	
HCFS202		15											HC202	
HCFS203		17											HC203	
HCFS204-12	3/4		3-3/8 85.7	2-1/2 63.5	0.750 19.1	0.454 15	1.161 29.5	7/16 11.5	1.795 45.6	1.721 43.7	0.673 17.1	3/8 M10	HC204-12	FS204
HCFS204		20											HC204	
HCFS205-14	7/8		3.622 93	2-3/4 69.9	0.748 19	0.454 15	1.181 30	7/16 11.5	1.807 45.9	1.748 44.4	0.689 17.5	3/8 M10	HC205-14	FS205
HCFS205-15	15/16												HC205-15	
HCFS205-16	1												HC205-16	
HCFS205		25											HC205	
HCFS206-17	1-1/16		4.173 106	3-1/4 82.6	0.826 20.9	5/8 15.9	1.280 32.5	33/64 13	1.972 50.1	1.906 48.4	0.721 18.3	7/16 M12	HC206-17	FS206
HCFS206-18	1-1/8												HC206-18	
HCFS206-19	1-3/16												HC206-19	
HCFS206-20	1-1/4												HC206-20	
HCFS206		30											HC206	
HCFS207-20	1-1/4		4.567 116	3-5/8 92.1	0.826 21	0.669 17	1.378 35	33/64 13	2.098 53.3	2.012 51.1	0.740 18.8	7/16 M12	HC207-20	FS207
HCFS207-21	1-5/16												HC207-21	
HCFS207-22	1-3/8												HC207-22	
HCFS207-23	1-7/16												HC207-23	
HCFS207		35											HC207	
HCFS208-24	1-1/2		5-1/8 130.2	4 101.6	0.945 24	21/32 16.7	1.535 39	35/64 14	2.319 58.9	2.217 56.3	0.843 21.4	7/16 M12	HC208-24	FS208
HCFS208-25	1-9/16												HC208-25	
HCFS208		40											HC208	
HCFS209-26	1-5/8		5.315 135	4-1/8 105	0.945 24	23/32 18.3	1.575 40	5/8 16	2.319 58.9	2.217 56.3	0.843 21.4	1/2 M14	HC209-26	FS209
HCFS209-27	1-11/16												HC209-27	
HCFS209-28	1-3/4												HC209-28	
HCFS209		45											HC209	
HCFS210-29	1-13/16		5-5/8 142.9	4-3/8 111.1	1.102 28	0.787 20	1.771 45	5/8 16	2.602 66.1	2.469 62.7	0.969 24.6	1/2 M14	HC210-29	FS210
HCFS210-30	1-7/8												HC210-30	
HCFS210-31	1-15/16												HC210-31	
HCFS210-32	2												HC210-32	
HCFS210		50											HC210	

Note: 1) Relubricatable types have suffix "D1". If maintenance free type is needed, please order without suffix "D1".

Flange Units – Standard 4-Bolt Eccentric Locking Collar

- Standard duty, high-grade cast iron
- Solid base housing design
- Wide inner ring bearing
- Relubricatable unit
- Standard seal: R-seal

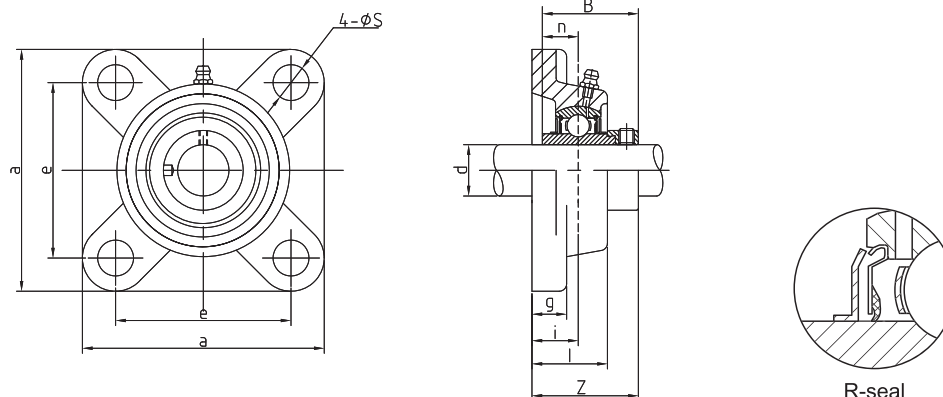

HCFS200 Series


Bearing Unit	Shaft Dia.		Dimensions										Bearing No.	Housing No.
	(in.)	(mm)	a	e	i	g	l	s	Z	B	n	Bolt Size		
HCFS211-32	2												HC211-32	FS211
HCFS211-33	2-1/16												HC211-33	
HCFS211-34	2-1/8		6-3/8	5-1/8	1.220	0.827	1.929	43/64	2.976	2.811	1.095	1/2	HC211-34	
HCFS211-35	2-3/16		161.9	130.2	31	21	49	17	75.6	71.4	27.8	M14	HC211-35	
HCFS211		55											HC211	
HCFS212-36	2-1/4												HC212-36	FS212
HCFS212-37	2-5/16												HC212-37	
HCFS212-38	2-3/8		6-7/8	5-5/8	1.343	0.866	2.106	43/64	3.181	3.063	1.221	1/2	HC212-38	
HCFS212-39	2-7/16		174.6	142.9	34.1	22	53.5	17	80.8	77.8	31	M14	HC212-39	
HCFS212		60											HC212	
HCFS213-40	2-1/2												HC213-40	FS213
HCFS213-41	2-9/16		7.244	5-7/8	1.500	7/8	2-9/32	45/64	3.528	3.374	1.343	5/8	HC213-41	
HCFS213		65	184	149	38.1	22.2	58	18	89.6	85.7	34.1	M16	HC213	
HCFS214-42	2-5/8												HC214-42	FS214
HCFS214-43	2-11/16		7.402	6	1.500	7/8	2-23/64	45/64	3.528	3.374	1.343	5/8	HC214-43	
HCFS214-44	2-3/4		188	152.4	38.1	22.2	60	18	89.6	85.7	34.1	M16	HC214-44	
HCFS214		70											HC214	
HCFS215-45	2-13/16												HC215-45	FS215
HCFS215-46	2-7/8												HC215-46	
HCFS215-47	2-15/16		7-7/8	6	1.609	0.945	2-7/16	25/32	3.772	3.626	1.469	5/8	HC215-47	
HCFS215-48	3		200	152.4	40.8	24	62	20	95.8	92.1	37.3	M16	HC215-48	
HCFS215		75											HC215	

Note: 1) Relubricatable types have suffix "D1". If maintenance free type is needed, please order without suffix "D1".



Flange Units – Standard 4-Bolt Set Screw Locking

- Standard duty, high-grade cast iron
- Solid base housing design
- Wide inner ring bearing
- Relubricatable unit
- Standard seal: R-seal

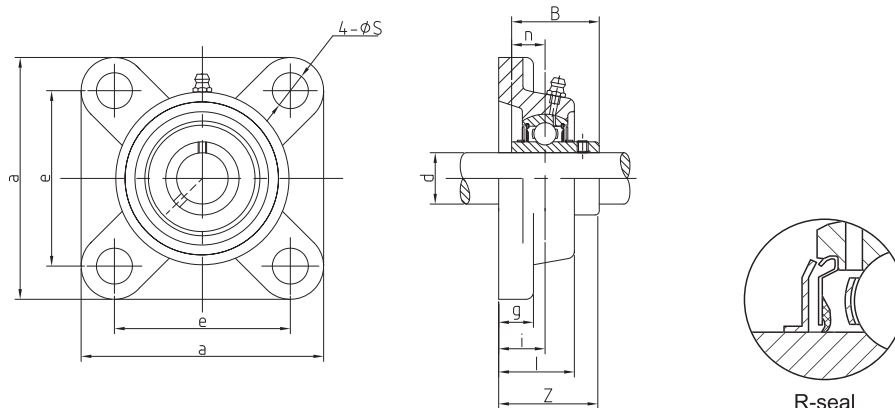


UCFS200 Series

Bearing Unit	Shaft Dia.		Dimensions										Bearing No.	Housing No.
	(in.)	(mm)	a	e	i	g	l	s	Z	B	n	Bolt Size		
UCFS201-8	1/2		3-3/8 85.7	2-1/2 63.5	0.750 19.1	0.454 15	1.161 29.5	7/16 11.5	1.469 37.3	1.2205 31	0.500 12.7	3/8 M10	UC201-8	FS204
UCFS202-9	9/16												UC202-9	
UCFS202-10	5/8												UC202-10	
UCFS203-11	11/16												UC203-11	
UCFS201		12											UC201	
UCFS202		15											UC202	
UCFS203		17											UC203	
UCFS204-12	3/4		3-3/8 85.7	2-1/2 63.5	0.750 19.1	0.454 15	1.161 29.5	7/16 11.5	1.469 37.3	1.2205 31	0.500 12.7	3/8 M10	UC204-12	FS204
UCFS204		20											UC204	
UCFS205-13	13/16		3.622 93	2-3/4 69.9	0.748 19	0.454 15	1.181 30	7/16 11.5	1.528 38.8	1.3425 34.1	0.563 14.3	3/8 M10	UC205-13	FS205
UCFS205-14	7/8												UC205-14	
UCFS205-15	15/16												UC205-15	
UCFS205-16	1												UC205-16	
UCFS205		25											UC205	
UCFS206-17	1-1/16		4.173 106	3-1/4 82.6	0.826 20.9	5/8 15.9	1.280 32.5	33/64 13	2.01 42.2	1.500 38.1	0.626 15.9	7/16 M12	UC206-17	FS206
UCFS206-18	1-1/8												UC206-18	
UCFS206-19	1-3/16												UC206-19	
UCFS206-20	1-1/4												UC206-20	
UCFS206		30											UC206	
UCFS207-20	1-1/4		4.567 116	3-5/8 92.1	0.826 21	0.669 17	1.378 35	33/64 13	1.827 46.4	1.6890 42.9	0.689 17.5	7/16 M12	UC207-20	FS207
UCFS207-21	1-5/16												UC207-21	
UCFS207-22	1-3/8												UC207-22	
UCFS207-23	1-7/16												UC207-23	
UCFS207		35											UC207	
UCFS208-24	1-1/2		5-1/8 130.2	4 101.6	0.945 24	21/32 16.7	1.535 39	35/64 14	2.134 54.2	1.9370 49.2	0.748 19	7/16 M12	UC208-24	FS208
UCFS208-25	1-9/16												UC208-25	
UCFS208		40											UC208	
UCFS209-26	1-5/8		5.315 135	4-1/8 105	0.945 24	23/32 18.3	1.575 40	5/8 16	2.134 54.2	1.9370 49.2	0.748 19	1/2 M14	UC209-26	FS209
UCFS209-27	1-11/16												UC209-27	
UCFS209-28	1-3/4												UC209-28	
UCFS209		45											UC209	
UCFS210-29	1-13/16		5-5/8 142.9	4-3/8 111.1	1.102 28	0.787 20	1.771 45	5/8 16	2.386 60.6	2.0315 51.6	0.748 19	1/2 M14	UC210-29	FS210
UCFS210-30	1-7/8												UC210-30	
UCFS210-31	1-15/16												UC210-31	
UCFS210-32	2												UC210-32	
UCFS210		50											UC210	

Note: 1) Relubricatable types have suffix "D1". If maintenance free type is needed, please order without suffix "D1".

Flange Units – Standard 4-Bolt Set Screw Locking

- Standard duty, high-grade cast iron
- Solid base housing design
- Wide inner ring bearing
- Relubricatable unit
- Standard seal: R-seal

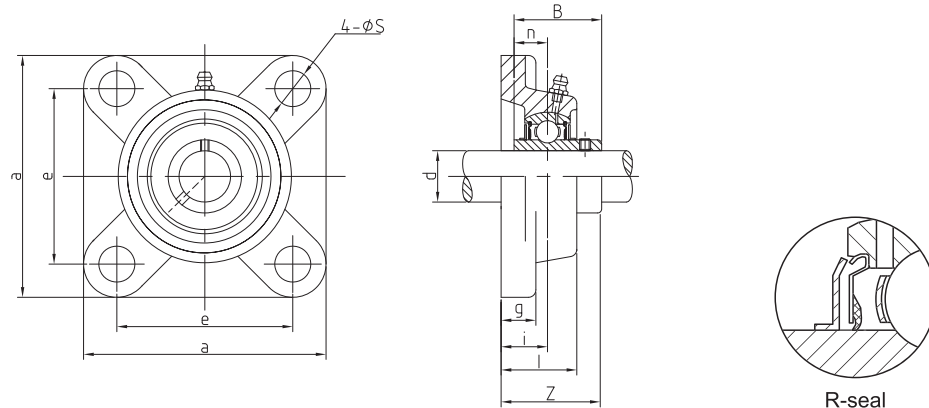

UCFS200 Series




Bearing Unit	Shaft Dia.		Dimensions in.										Bearing No.	Housing No.
	(in.)	(mm)	a	e	i	g	l	s	Z	B	n	Bolt Size		
UCFS211-32	2		6-3/8 161.9	5-1/8 130.2	1.220 31	0.827 21	1.929 49	43/64 17	2.575 65.4	2.1890 55.6	0.874 22.2	1/2 M14	UC211-32	FS211
UCFS211-33	2-1/16												UC211-33	
UCFS211-34	2-1/8												UC211-34	
UCFS211-35	2-3/16												UC211-35	
UCFS211		55											UC211	
UCFS212-36	2-1/4		6-7/8 174.6	5-5/8 142.9	1.343 34.1	0.866 22	2.106 53.5	43/64 17	2.902 73.7	2.5630 65.1	1.000 25.4	1/2 M14	UC212-36	FS212
UCFS212-37	2-5/16												UC212-37	
UCFS212-38	2-3/8												UC212-38	
UCFS212-39	2-7/16												UC212-39	
UCFS212		60											UC212	
UCFS213-40	2-1/2		7.244 184	5-7/8 149	1.500 38.1	7/8 22.2	2-9/32 58	45/64 18	3.059 77.7	2.5630 65.1	1.000 25.4	5/8 M16	UC213-40	FS213
UCFS213-41	2-9/16												UC213-41	
UCFS213		65											UC213	
UCFS214-42	2-5/8		7.402 188	6 152.4	1.500 38.1	7/8 22.2	2-23/64 60	45/64 18	3.244 82.4	2.9370 74.6	1.189 30.2	5/8 M16	UC214-42	FS214
UCFS214-43	2-11/16												UC214-43	
UCFS214-44	2-3/4												UC214-44	
UCFS214		70											UC214	
UCFS215-45	2-13/16		7-7/8 200	6 152.4	1.609 40.8	0.945 24	2-7/16 62	25/32 20	3.366 85.5	3.0630 77.8	1.311 33.3	5/8 M16	UC215-45	FS215
UCFS215-46	2-7/8												UC215-46	
UCFS215-47	2-15/16												UC215-47	
UCFS215-48	3												UC215-48	
UCFS215		75											UC215	

Note: 1) Relubricatable types have suffix "D1". If maintenance free type is needed, please order without suffix "D1".



Flange Units – Standard 4-Bolt Set Screw Locking

- Heavy duty, high-grade cast iron
- Piloted flange offers extra support for heavier loads
- Solid base housing design
- Wide inner ring bearing
- Relubricatable unit
- Standard seal: R-seal

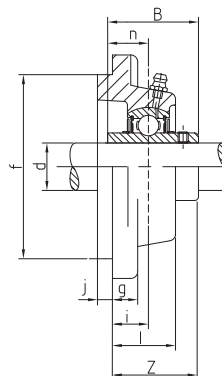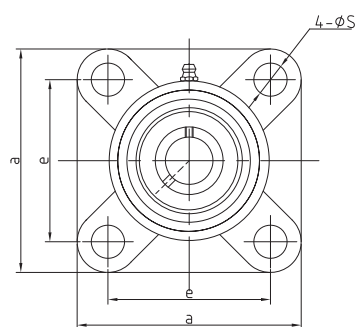

R-seal

UCFS300 Series




Bearing Unit	Shaft Dia.		Dimensions in. mm												Bearing No.	Housing No.
	(in.)	(mm)	a	e	i	s	j	g	l	f	z	B	n	Bolt Size		
UCFS305		25	4-11/32 110	3-5/32 80	23/64 9	5/8 16	9/32 7	1/2 13	0.866 22	3.1496 80	1.260 32	1.4961 38	0.591 15	1/2 M14	UC305	FS305
UCFS305-13	13/16														UC305-13	
UCFS305-14	7/8														UC305-14	
UCFS305-15	15/16														UC305-15	
UCFS305-16	1														UC305-16	
UCFS306		30	4-29/32 125	3-47/64 95	25/64 10	5/8 16	5/16 8	19/32 15	0.945 24	3.5433 90	1.417 36	1.6929 43	0.669 17	1/2 M14	UC306	FS306
UCFS306-17	1-1/16														UC306-17	
UCFS306-18	1-1/8														UC306-18	
UCFS306-19	1-3/16														UC306-19	
UCFS307		35	5-5/16 135	3-15/16 100	7/16 11	3/4 19	23/64 9	5/8 16	1.063 27	3.9730 100	1.578 40	1.8898 48	0.748 19	5/8 M16	UC307	FS307
UCFS307-20	1-1/4														UC307-20	
UCFS307-21	1-5/16														UC307-21	
UCFS307-22	1-3/8														UC307-22	
UCFS307-23	1-7/16														UC307-23	
UCFS308		40	5-29/32 150	4-13/32 112	33/64 13	3/4 19	25/64 10	21/32 17	1.181 30	4.5276 115	1.811 46	2.0472 52	0.748 19	5/8 M16	UC308	FS308
UCFS308-24	1-1/2														UC308-24	
UCFS308-25	1-9/16														UC308-25	
UCFS309		45													UC309	
UCFS309-26	1-5/8		6-5/16 160	4-59/64 125	35/64 14	3/4 19	7/16 11	23/32 18	1.299 33	4.9213 125	1.929 49	2.2441 57	0.866 22	5/8 M16	UC309-26	
UCFS309-27	1-11/16														UC309-27	
UCFS309-28	1-3/4														UC309-28	
UCFS310		50	6-7/8 175	5-13/64 132	5/8 16	29/32 23	15/32 12	3/4 19	1.417 36	5.5118 140	2.165 55	2.4016 61	0.866 22	3/4 M20	UC310	FS310
UCFS310-29	1-13/16														UC310-29	
UCFS310-30	1-7/8														UC310-30	
UCFS310-31	1-15/16														UC310-31	
UCFS311		55	7-9/32 185	5-33/64 140	43/64 17	29/32 23	33/64 13	25/32 20	1.535 39	5.9055 150	2.283 58	2.5984 66	0.984 25	3/4 M20	UC311	FS311
UCFS311-32	2														UC311-32	
UCFS311-33	2-1/16														UC311-33	
UCFS311-34	2-1/8														UC311-34	
UCFS311-35	2-3/16														UC311-35	
UCFS312		60	7-11/16 195	5-29/32 150	3/4 19	29/32 23	35/64 14	7/8 22	1.653 42	6.2922 160	2.520 64	2.7953 71	0.984 26	3/4 M20	UC312	FS312
UCFS312-36	2-1/4														UC312-36	
UCFS312-37	2-5/16														UC312-37	
UCFS312-38	2-3/8														UC312-38	
UCFS312-39	2-7/16														UC312-39	
UCFS313		65	8-3/16 208	6-17/32 166	19/32 15	29/32 23	45/64 18	7/8 22	1.575 40	6.8898 175	2.362 60	2.9528 75	1.181 30	3/4 M20	UC313	FS313
UCFS313-40	2-1/2														UC313-40	
UCFS313-41	2-9/16														UC313-41	

Note: 1) Relubricatable types have suffix "D1". If maintenance free type is needed, please order without suffix "D1".



Flange Units – Standard 4-Bolt Set Screw Locking

- Heavy duty, high-grade cast iron
- Piloted flange offers extra support for heavier loads
- Solid base housing design
- Wide inner ring bearing
- Relubricatable unit
- Standard seal: R-seal

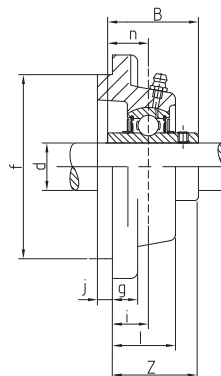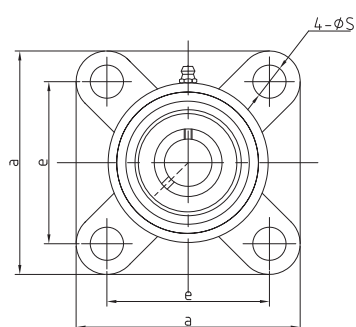

R-seal


UCFS300 Series

Bearing Unit	Shaft Dia.		Dimensions												Bearing No.	Housing No.
	(in.)	(mm)	a	e	i	s	j	g	l	f	z	B	n	Bolt Size		
UCFS314		70													UC314 UC314-42 UC314-43 UC314-44	FS314
UCFS314-42	2-5/8		8-25/32	6-1/64	45/64	63/64	45/64	31/32	1.693	7.2835	2.480	3.0708	1.299	7/8		
UCFS314-43	2-11/16		226	178	18	25	18	25	43	185	63	78	33	M22		
UCFS314-44	2-3/4															
UCFS315		75													UC315 UC315-45 UC315-46 UC315-47 UC315-48	FS315
UCFS315-45	2-13/16		9-9/32	7-1/4	53/64	63/64	45/64	31/32	1.890	7.8740	2.795	3.2283	1.260	7/8		
UCFS315-46	2-7/8		236	184	21	25	18	25	48	200	71	82	32	M22		
UCFS315-47	2-15/16															
UCFS315-48	3															
UCFS316		80													UC316 UC316-49 UC316-50 UC316-51	FS316
UCFS316-49	3-1/16		9-27/32	7-23/32	45/64	1-7/32	25/32	1-1/16	1.890	8.2677	2.756	3.3858	1.339	1		
UCFS316-50	3-1/8		250	196	18	31	20	27	48	210	70	86	34	M27		
UCFS316-51	3-3/16															
UCFS317		85													UC317 UC317-52 UC317-53 UC317-55	FS317
UCFS317-52	3-1/4		10-1/4	8-1/32	15/16	1-7/32	25/32	1-1/16	2.126	8.6614	3.150	9.7795	1.575	1		
UCFS317-53	3-5/16		260	204	24	31	20	27	54	220	80	96	40	M27		
UCFS317-55	3-7/16															
UCFS318		90													UC318 UC318-55 UC318-56	FS318
UCFS318-55	3-7/16		11-1/32	8-1/2	15/16	1-3/8	25/32	1-3/16	2.205	9.4488	3.150	9.7795	1.575	1-1/8		
UCFS318-56	3-1/2		280	216	24	35	20	30	56	240	80	96	40	M30		

Note: 1) Relubricatable types have suffix "D1". If maintenance free type is needed, please order without suffix "D1".

Flange Units – Standard 4-Bolt Eccentric Locking Collar

- Standard duty , high-grade cast iron
- Narrow inner ring bearing
- Relubricatable unit
- Standard seal: RST-Seal

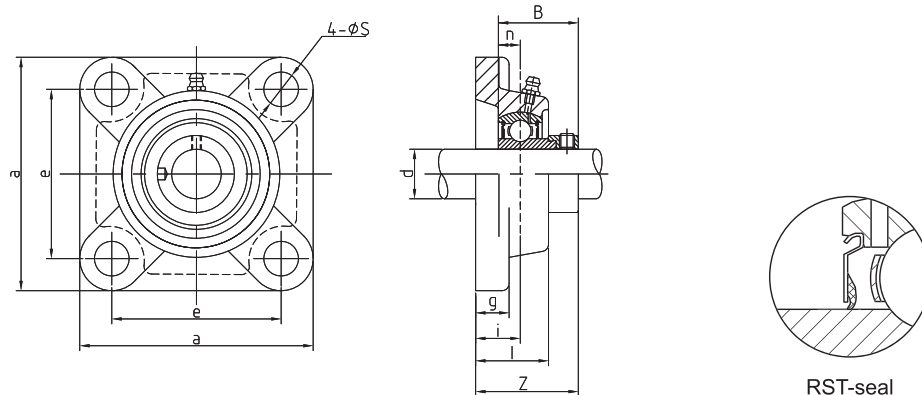

SAF200 Series




Bearing Unit	Shaft Dia.		Dimensions					in. mm	Z	B	n	Bolt Size	Bearing No.	Housing No.
	(in.)	(mm)	a	e	i	g	l	s						
SAF201-8	1/2		3-3/8 85.7	2-1/2 63.5	0.592 15	0.433 11	1 25.4	27/64 11	1.46 37.1	1.126 28.6	0.256 6.5	3/8 M10	SAF201-8	F203S
SAF202-10	5/8												SAF202-10	
SAF203-11	11/16												SAF203-11	
SAF201		12											SAF201	
SAF202		15											SAF202	
SAF203		17											SAF203	
SAF204-12	3/4		3-3/8 85.7	2-1/2 63.5	0.592 15	7/16 11.1	1 25.4	0.472 12	1-17/32 38.9	1.220 31	0.2953 7.5	3/8 M10	SA204-12	F204
SAF204-13	13/16												SA204-13	
SAF204		20											SA204	
SAF205-13	13/16		3-3/4 95.3	2-3/4 69.9	0.631 16	0.551 14	1-1/16 26.9	15/32 12	1-35/64 39.3	1.220 31	0.2953 7.5	3/8 M10	SA205-13	F205
SAF205-14	7/8												SA205-14	
SAF205-15	15/16												SA205-15	
SAF205-16	1												SA205-16	
SAF205		25											SA205	
SAF206-17	1-1/16		4-1/4 108	3-1/4 82.6	0.720 18.3	9/16 14.3	1.220 31	15/32 12	1-51/64 45.6	1.41 35.7	0.3543 9	3/8 M10	SA206-17	F206
SAF206-18	1-1/8												SA206-18	
SAF206-19	1-3/16												SA206-19	
SAF206-20	1-1/4												SA206-20	
SAF206		30											SA206	
SAF207-20	1-1/4		4-19/32 116.7	3-5/8 92.1	0.750 19.1	0.630 16	1.339 34	17/32 13.5	1-15/16 49.0	1.53 38.9	0.3740 9.5	7/16 M12	SA207-20	F207
SAF207-21	1-5/16												SA207-21	
SAF207-22	1-3/8												SA207-22	
SAF207-23	1-7/16												SA207-23	
SAF207		35											SA207	
SAF208-24	1-1/2		5-1/8 130.2	4 101.6	0.834 21.2	0.630 16	1-13/32 35.7	0.630 16	2-1/8 53.7	1.72 43.7	0.4334 11	1/2 M14	SA208-24	F208
SAF208-25	1-9/16												SA208-25	
SAF208		40											SA208	
SAF209-26	1-5/8		5-3/8 136.5	4-1/8 105	0.874 22.2	0.709 18	1-1/2 38.1	0.630 16	2-5/32 54.7	1.72 43.7	0.4334 11	1/2 M14	SA209-26	F209
SAF209-27	1-11/16												SA209-27	
SAF209-28	1-3/4												SA209-28	
SAF209		45											SA209	
SAF210-29	1-13/16		5-5/8 142.9	4.370 111	0.873 22.2	0.709 18	1-9/16 39.7	0.630 16	2-5/32 54.7	1.72 43.7	0.4334 11	1/2 M14	SA210-29	F210
SAF210-30	1-7/8												SA210-30	
SAF210-31	1-15/16												SA210-31	
SAF210-32	2												SA210-32	
SAF210		50											SA210	

Note: 1) Relubricatable types have suffix "D1". If maintenance free type is needed, please order without suffix "D1".



Flange Units – Standard 4-Bolt Eccentric Locking Collar

- Standard duty , high-grade cast iron
- Narrow inner ring bearing
- Relubricatable unit
- Standard seal: RST-Seal

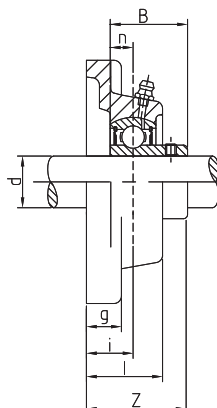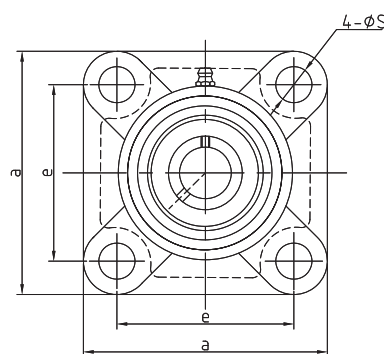

RST-seal


SBF200 Series

Bearing Unit	Shaft Dia.		Dimensions in. mm										Bearing No.	Housing No.
	(in.)	(mm)	a	e	i	g	l	s	Z	B	n	Bolt Size		
SBF201-8	1/2		3-3/8 85.7	2-1/2 63.5	0.592 15	0.433 11	1 25.4	27/64 11	1-7/32 31	0.886 22.5	0.2559 6.5	3/8 M10	SBF201-8	F203S
SBF202-10	5/8												SBF202-10	
SBF203-11	11/16												SBF203-11	
SBF201		12											SBF201	
SBF202		15											SBF202	
SBF203		17											SBF203	
SBF204-12	3/4		3-3/8 85.7	2-1/2 63.5	0.592 15	7/16 11.1	1 25.4	0.472 12	1-19/64 32.5	0.984 25	0.2953 7.5	3/8 M10	SB204-12	F204
SBF204-13	13/16												SB204-13	
SBF204		20											SB204	
SBF205-13	13/16		3-3/4 95.3	2-3/4 69.9	0.631 16	0.551 14	1-1/16 26.9	15/32 12	1-35/64 35.5	1.063 27	0.2953 7.5	3/8 M10	SB205-13	F205
SBF205-14	7/8												SB205-14	
SBF205-15	15/16												SB205-15	
SBF205-16	1												SB205-16	
SBF205		25											SB205	
SBF206-17	1-1/16		4-1/4 108	3-1/4 82.6	0.720 18.3	9/16 14.3	1.220 31	15/32 12	1.55 39.3	1.1811 30	0.3543 9	3/8 M10	SB206-17	F206
SBF206-18	1-1/8												SB206-18	
SBF206-19	1-3/16												SB206-19	
SBF206-20	1-1/4												SB206-20	
SBF206		30											SB206	
SBF207-20	1-1/4		4-19/32 116.7	3-5/8 92.1	0.750 19.1	0.630 16	1.339 34	17/32 13.5	1.64 41.67	1.260 32	0.3740 9.5	7/16 M12	SB207-20	F207
SBF207-21	1-5/16												SB207-21	
SBF207-22	1-3/8												SB207-22	
SBF207-23	1-7/16												SB207-23	
SBF207		35											SB207	
SBF208-24	1-1/2		5-1/8 130.2	4 101.6	0.834 21.2	0.630 16	1-13/32 35.7	0.630 16	1.91 48.5	1.339 34	0.4331 11	1/2 M14	SB208-24	F208
SBF208-25	1-9/16												SB208-25	
SBF208		40											SB208	
SBF209-26	1-5/8		5-3/8 136.5	4-1/8 105	0.874 22.2	0.709 18	1-1/2 38.1	0.630 16	2.00 50.7	1.622 41.2	0.4331 11	1/2 M14	SB209-26	F209
SBF209-27	1-11/16												SB209-27	
SBF209-28	1-3/4												SB209-28	
SBF209		45											SB209	
SBF210-29	1-13/16		5-5/8 142.9	4.370 111	0.873 22.2	0.709 18	1-9/16 39.7	0.630 16	2.16 54.8	1.717 43.6	0.4331 11	1/2 M14	SB210-29	F210
SBF210-30	1-7/8												SB210-30	
SBF210-31	1-15/16												SB210-31	
SBF210-32	2												SB210-32	
SBF210		50											SB210	

Note: 1) Relubricatable types have suffix "D1". If maintenance free type is needed, please order without suffix "D1".

Flange Units – Cartridge 4-Bolt Set Screw Locking

- Standard duty, high-grade cast iron
- Solid base housing design
- Wide inner ring bearing
- Relubricatable unit with anti-rotation pin
- Standard seal: R-seal

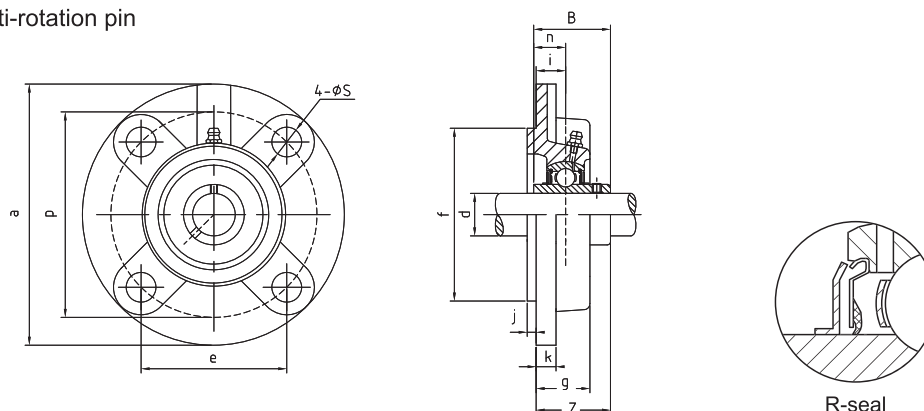


UCFC200 Series

Bearing Unit	Shaft Dia.		Dimensions													Bearing No.	Housing No.
	(in.)	(mm)	a	p	e	i	s	j	k	g	f	Z	B	n	Bolt Size		
UCFC201-8	1/2		3-15/16	3-5/64	2-11/64	25/64	15/32	13/64	9/32	13/16	2.441	1-1/8	1.2205	0.500	3/8	UC201-8	FC204
UCFC201		12	100	78.2	55.2	9.9	11.9	5.2	7.1	20.4	62	28.3	31	12.7	M10	UC201	
UCFC202-9	9/16		3-15/16	3-5/64	2-11/64	25/64	15/32	13/64	9/32	13/16	2.441	1-1/8	1.2205	0.500	3/8	UC202-9	FC204
UCFC202-10	5/8		100	78.2	55.2	9.9	11.9	5.2	7.1	20.4	62	28.3	31	12.7	M10	UC202-10	
UCFC202		15														UC202	
UCFC203-11	11/16		3-15/16	3-5/64	2-11/64	25/64	15/32	13/64	9/32	13/16	2.441	1-1/8	1.2205	0.500	3/8	UC203-11	FC204
UCFC203		17	100	78.2	55.2	9.9	11.9	5.2	7.1	20.4	62	28.3	31	12.7	M10	UC203	
UCFC204-12	3/4		3-15/16	3-5/64	2-11/64	25/64	15/32	13/64	9/32	13/16	2.441	1-1/8	1.2205	0.500	3/8	UC204-12	FC204
UCFC204-13	13/16		100	78.2	55.2	9.9	11.9	5.2	7.1	20.4	62	28.3	31	12.7	M10	UC204-13	
UCFC204		20														UC204	
UCFC205-13	13/16															UC205-13	FC205
UCFC205-14	7/8															UC205-14	
UCFC205-15	15/16		4-17/32	3-35/64	2-1/2	25/64	15/32	15/64	9/32	13/16	2.756	1-11/64	1.3386	0.563	3/8	UC205-15	
UCFC205-16	1		115.1	90.1	63.5	9.9	11.9	5.9	7.1	20.4	70	29.8	34	14.3	M10	UC205-16	
UCFC205		25														UC205	
UCFC206-17	1-1/16															UC206-17	FC206
UCFC206-18	1-1/8															UC206-18	
UCFC206-19	1-3/16		4-9/32	3-15/16	2-25/32	25/64	15/32	5/16	5/16	0.906	3.150	1-17/64	1.5000	0.626	3/8	UC206-19	
UCFC206-20	1-1/4		124.6	100	70.6	9.9	11.9	7.9	7.9	23	80	32.2	38.1	15.9	M10	UC206-20	
UCFC206		30														UC206	
UCFC207-20	1-1/4															UC207-20	FC207
UCFC207-21	1-5/16															UC207-21	
UCFC207-22	1-3/8		5-5/16	4-21/64	3-1/16	7/16	35/64	5/16	11/32	1.024	3.543	1-7/16	1.6890	0.689	7/16	UC207-22	
UCFC207-23	1-7/16		134.9	109.9	77.8	11.1	13.9	7.9	8.7	26	90	36.4	42.9	17.5	M12	UC207-23	
UCFC207		35														UC207	
UCFC208-24	1-1/2															UC208-24	FC208
UCFC208-25	1-9/16		5-23/32	4-23/32	3-11/32	7/16	35/64	25/64	11/32	1-1/64	3.937	1-5/8	1.9370	0.748	7/16	UC208-25	
UCFC208		40	145.3	119.9	84.9	11.1	13.9	9.9	8.7	25.8	100	41.2	49.2	19	M12	UC208	
UCFC209-26	1-5/8															UC209-26	FC209
UCFC209-27	1-11/16		6-5/16	5-13/64	3-43/64	25/64	5/8	15/32	9/16	1-1/64	4.139	1-37/64	1.9370	0.748	1/2	UC209-27	
UCFC209-28	1-3/4		160.3	132.2	93.3	9.9	15.9	11.9	14.3	25.8	105	40.2	49.2	19	M14	UC209-28	
UCFC209		45														UC209	
UCFC210-29	1-13/16															UC210-29	FC210
UCFC210-30	1-7/8															UC210-30	
UCFC210-31	1-15/16		6-1/2	5-7/16	3-27/32	25/64	5/8	15/32	0.551	1.102	4.331	1-11/16	2.0315	0.748	1/2	UC210-31	
UCFC210-32	2		165.1	138.1	97.6	9.9	15.9	11.9	14	28	110	42.6	51.6	19	M14	UC210-32	
UCFC210		50														UC210	

Note: 1) Relubricatable types have suffix "D1". If maintenance free type is needed, please order without suffix "D1".

Flange Units – Cartridge 4-Bolt Set Screw Locking

- Standard duty, high-grade cast iron
- Solid base housing design
- Wide inner ring bearing
- Relubricatable unit with anti-rotation pin
- Standard seal: R-seal

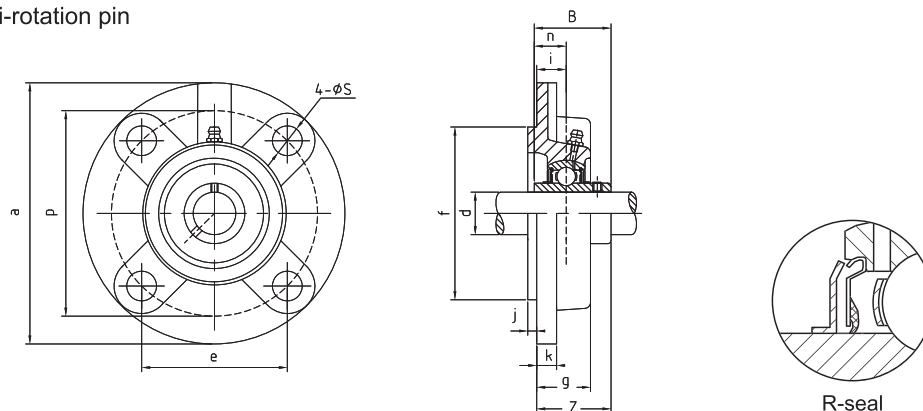

UCFC200 Series

Bearing Unit	Shaft Dia.		Dimensions in. mm													Bearing No.	Housing No.
	(in.)	(mm)	a	p	e	i	s	j	k	g	f	Z	B	n	Bolt Size		
UCFC211-32	2															UC211-32 UC211-33 UC211-34 UC211-35 UC211	FC211
UCFC211-33	2-1/16																
UCFC211-34	2-1/8		7-9/32	5-29/32	4-11/64	33/64	3/4	15/32	19/32	1.220	4.922	1-53/64	2.1890	0.874	5/8		
UCFC211-35	2-3/16		184.9	150	105.9	13.1	19.1	11.9	15.1	31	125	46.4	55.6	22.2	M16		
UCFC211		55															
UCFC212-36	2-1/4															UC212-36 UC212-37 UC212-38 UC212-39 UC212	FC212
UCFC212-37	2-5/16																
UCFC212-38	2-3/8		7-11/16	6-19/64	4-29/64	43/64	3/4	15/32	19/32	1-13/32	5.315	2-15/64	2.5630	1.000	5/8		
UCFC212-39	2-7/16		195.3	159.9	113.1	17.1	19.1	11.9	15.1	35.7	135	56.7	65.1	25.4	M16		
UCFC212		60															
UCFC213-40	2-1/2															UC213-40 UC213-41 UC213	FC213
UCFC213-41	2-9/16		8-1/16	6-11/16	4-47/64	5/8	3/4	35/64	19/32	1-27/64	5.709	1-3/16	2.5630	1.000	5/8		
UCFC213		65	204.8	169.9	120.3	15.9	19.1	13.9	15.1	36.1	145	55.7	65.1	25.4	M16		
UCFC214-42	2-5/8															UC214-42 UC214-43 UC214-44 UC214	FC214
UCFC214-43	2-11/16		8-15/32	6-31/32	4-59/64	43/64	3/4	35/64	23/32	1-37/64	5.906	1-13/32	2.9370	1.189	5/8		
UCFC214-44	2-3/4		215.1	177	125	17.1	19.1	13.9	18.3	40	150	61.4	74.6	30.2	M16		
UCFC214		70															
UCFC215-45	2-13/16															UC215-45 UC215-46 UC215-47 UC215-48 UC215	FC215
UCFC215-46	2-7/8																
UCFC215-47	2-15/16		8.661	7-1/4	5-1/8	45/64	3/4	5/8	45/64	1-37/64	6.297	2-15/32	3.0630	1.311	5/8		
UCFC215-48	3		220	184.2	130.6	17.9	19.1	15.9	17.9	40	160	62.5	77.8	33.3	M16		
UCFC215		75															
UCFC216-50	3-1/8															UC216-50 UC216	FC216
UCFC216		80	9-7/16	7-7/8	5-9/16	45/64	29/32	5/8	23/32	1-21/32	6.693	2-21/32	3.2520	1.311	3/4		
UCFC217-52	3-1/4															UC217-52 UC217-55 UC217	FC217
UCFC217-55	3-7/16		9-27/32	8-3/16	5-51/64	45/64	29/32	45/64	0.787	1-49/64	7.087	2-3/4	3.3740	1.343	3/4		
UCFC217		85	250	207.9	147.2	17.9	23	17.9	20	44.8	180	69.6	85.7	34.1	M20		
UCFC218-56	3-1/2															UC218-56 UC218-57	FC218
UCFC218		90	10-7/16	8-21/32	6-1/8	55/64	29/32	45/64	0.787	1-63/64	7.480	3-3/32	3.7795	1.563	3/4		
			265.1	219.9	155.6	21.8	23	17.9	20	50.4	190	78.3	96	39.7	M20		

Note: 1) Relubricatable types have suffix "D1". If maintenance free type is needed, please order without suffix "D1".